

SEWAGE PUMPS



LE40-Series

**4/10 hp 2" Solids handling
2" Discharge**

Features:

- Heavy cast iron construction
- Vortex-style impeller made of corrosion resistant high temperature polymer
- Oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- 10' Power cord with Quick-connect design standard (25' cord also available)
- Wide-angle float switch with series (piggyback) plug on automatic models

Model LE41M


115V, 12A, Manual (no float switch)

Model LE41A

115V, 12A, Wide-angle float switch

Model LE41AV

115V, 12A, Vertical float switch

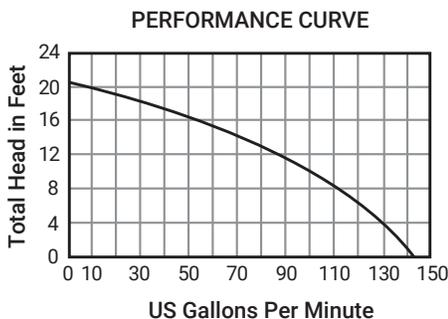

LE50-Series

**1/2 hp 2" Solids handling
2" Discharge**

Features:

- Heavy cast iron construction with 2 Vane semi-open corrosion resistant engineered thermoplastic elastomer impeller
- Oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- 10' Power cord with Quick-connect design standard (25' cord also available)
- Wide-angle float switch with series (piggyback) plug on automatic models

Model LE51M

115V, 12A, Manual (no float switch)

Model LE51A

115V, 12A, Wide-angle float switch

Model LE51AV


115V, 12A, Vertical float switch

Model LE52M

208-230V, 6.8A, Manual (no float switch)

Model LE52A

208-230V, 6.8A, Automatic

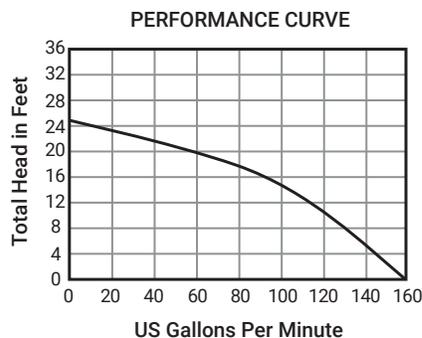

LE70-Series

**3/4 hp 2" Solids handling
2" or 3" Flanged discharge**

Features:

- Heavy cast iron construction
- 2 Vane cast iron impeller
- Oil-filled, thermally protected motor
- All stainless steel fasteners
- Stainless steel rotor shaft
- Single and 3-phase models
- 10' Power cord with Quick-connect standard on single-phase models (other cord lengths available)
- Wide-angle float switch with series (piggyback) plug on automatic models

Model LE71M

115V, 12A, Manual (no float switch)

Model LE71A

115V, 12A, Automatic


Model LE72M

208-230V, 6A, Manual (no float switch)

Model LE72A

208-230V, 6A, Automatic

Also available 208-230V, 440-480V

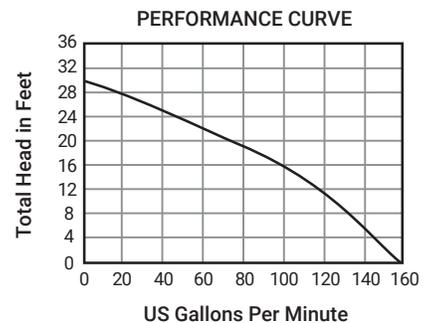

SEWAGE PUMPS



LE100-Series

1 hp 2" Solids handling
2" or 3" Flanged discharge

Features:

- Heavy cast iron construction
- 2 Vane, cast iron impeller
- Heavy-duty oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- Single and 3-phase models
- 10' Power cord with Quick-connect, standard on single-phase models (other cord lengths available)
- Wide-angle float switch with series (piggyback) plug on automatic models


Model LE102M

208-230V, 8A, Manual
(no float switch)

Model LE102A

208-230V, 8A, Automatic

Also available in 208/230V 3-phase,
440-480V 3-phase, and 575V 3-phase.



LEH100-Series

1 hp 2" Solids handling
2" or 3" Flanged discharge
High-Head

Features:

- Heavy cast iron construction
- 2 Vane, cast iron impeller
- Heavy-duty oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- Single and 3-phase models
- 10' Power cord with Quick-connect, standard on single-phase models (other cord lengths available)
- Wide-angle float switch with series (piggyback) plug on automatic models


Model LEH102M

230V, 12A, Manual
(no float switch)

Model LEH102A

230V, 12A, Automatic

Also available in 208/30V 3-phase,
440-480V 3-phase, and 575V 3-phase.



LEH150-Series

1.5 hp 2" Solids handling
2" or 3" Flanged discharge
High-Head

Features:

- Heavy cast iron construction
- Cast iron impeller
- Heavy-duty oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- Single and 3-phase models
- 25' Power cord with Quick-connect, standard on all models (other cord lengths available)
- Wide-angle float switch with series (piggyback) plug on all models


Model LEH152M

208-230V, 15A, Manual
(no float switch)

Model LEH152A

208-230V, 15A, Automatic

Also available in 208/230V 3-phase,
440-480V 3-phase, and 575V 3-phase.



LEH200-Series

2 hp 2" Solids handling
2" or 3" Flanged discharge
High-Head


Features:

- Heavy cast iron construction
- Cast iron impeller
- Heavy-duty oil-filled thermally protected motor
- Permanently lubricated bearings
- All stainless steel fasteners
- Stainless steel rotor shaft
- Single and 3-phase models
- 25' Power cord with Quick-connect, standard on all models (other cord lengths available)
- LEH200-Series requires a control panel for automatic operations

Model LEH202M

230V, 18A, Manual
(no float switch)

Also available in 208/230V 3-phase,
440-480V 3-phase, and 575V 3-phase.

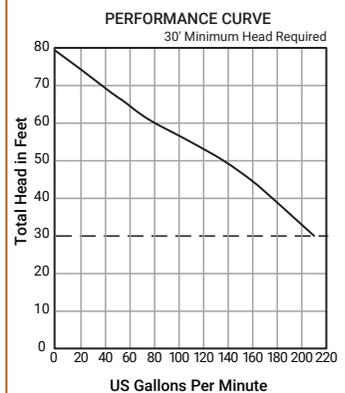

SEWAGE PUMPS

PERFORMANCE CURVE DATA

