

PUMPS OF OKLAHOMA, INC.
1220 N.W. 3rd Street Oklahoma City, Oklahoma 73106
Phone: (405) 235-2695 Fax: (405) 235-9897

XLPE/CPE SUBMERSIBLE PUMP CABLE


INSULATION (DIELECTRIC) MATERIAL: EXTRUDED CROSS-LINKED POLYETHYLENE
JACKET MATERIAL: EXTRUDED CPE JACKET
90°C rated

WATER AND OIL RESISTANT

LEAD ASSEMBLY SPECIFICATIONS

LEAD COMPONENT
SLEEVE
JAM NUT
BUSHING
POTTING

MATERIAL
316 STAINLESS STEEL
316 STAINLESS STEEL
VITON
EPOXY(CHEMICAL RESISTANT)

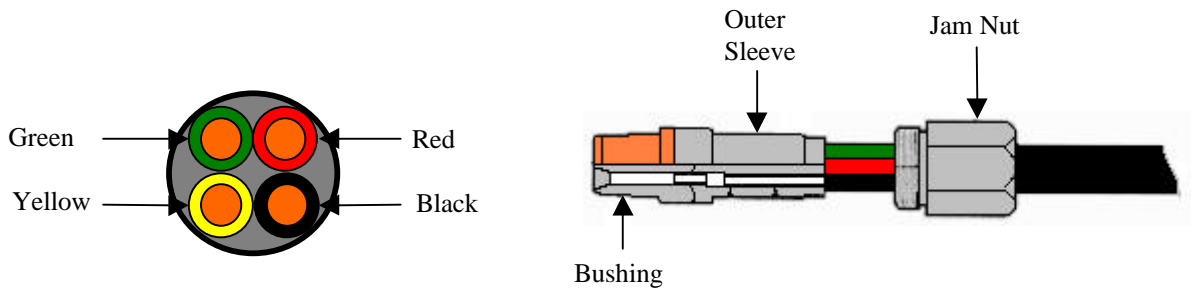

CONSTRUCTION:

CONDUCTORS: 12 AWG 19/25 tin electroplated

INSULATION: .030" wall nom.

COLOR CODE: Black, Red, Green, and Yellow

JACKET: .045" Wall nom

FINAL O.D. .439"