



1220 N.W. 3rd Street Oklahoma City, Oklahoma 73106

Phone: (405) 235-2695 Fax: (405) 235-9897


#12 AWG 3 conductor plus ground Oil, Water, and Weather Resistant (SOOW) Cable

PACKAGE CABLE

The construction of this pump cable exceeds the electrical and physical test parameters of UL standards 83 that covers deep well submersible pump cable.

The SOOW cable is a round black jacketed cable rated up to 600 volts. SOOW is approved for indoor or outdoor use at temperatures ranging from -40°C to 90°C in dry or wet locations. The copper conductors, EPDM rubber insulation and CPE jacket are all highly flexible. SOOW cables provide high resistance to both oil and water making them ideal for use in tough environments.

Regarding the installation of this cable; SOOW cables are permitted for use as specified by the NEC article 400 methods. They are UL and CSA certified for indoor and outdoor use.

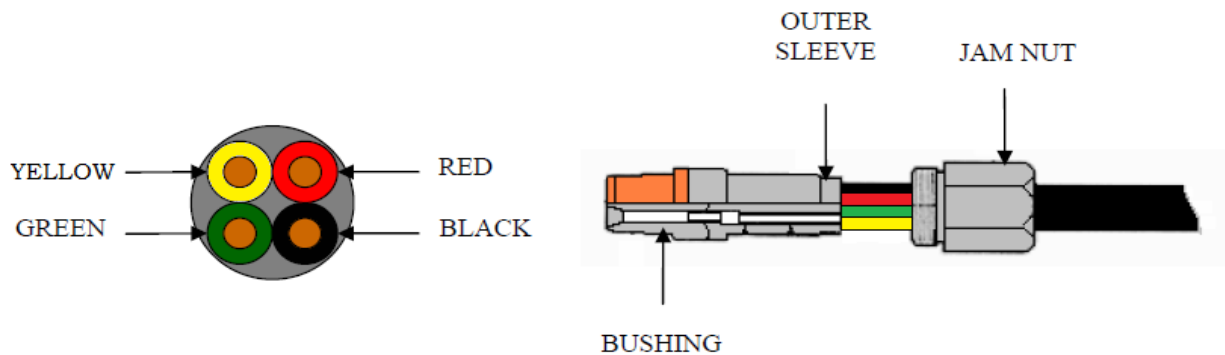

CONSTRUCTION: Sleeve and Jam Nut - 316 Stainless Steel, Bushing - 4" Viton / 6" Polychloroprene

CONDUCTORS: **65 X 30AWG**

INSULATION: .045" wall nom.

COLOR CODE: Black, Red, Green, and Yellow

JACKET: .095" wall nom.

OVERALL DIAMETER: .650"