

PUMPSOKReal. Friendly. Experts:

Pumps of Oklahoma Inc.
1220 N.W. 3rd Street • Oklahoma City, OK 73106
Toll-free 1.800.669.3574 • Phone: 405.235.2695
Fax: 405.235.9897 • Web: pumpsok.com


DIMENSIONS AND WEIGHTS

		HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP WT.
MODEL NO.	FIG		OILL	OILL	Α	В	С	D	E	O.I.I. W.I.
7S03-8PETF	Α	1/3	4"	1" NPT	21.5	8.8	12.7	3.8	3.9	27
7S05-11PETF	Α	1/2	4"	1" NPT	24.7	9.5	15.2	3.8	3.9	30
7S07-15PETF	Α	3/4	4"	1" NPT	29.2	10.7	18.5	3.8	3.9	33
7S10-19PETF	Α	1	4"	1" NPT	33.6	11.8	21.8	3.8	3.9	36
7S15-26PETF	Α	1 1/2	4"	1" NPT	41.2	13.6	27.6	3.8	3.9	46

NOTES: All models suitable for use in 4" wells. Weights include pump end with motor in lbs.

MATERIALS OF CONSTRUCTION

COMPONENT	SPLINE SHAFT						
Check Valve Housing	304 Stainless Steel						
Check Valve	304 Stainless Steel						
Diffuser Chamber	304 Stainless Steel						
Impeller	304 Stainless Steel						
Suction Interconnector	304 Stainless Steel						
Inlet Screen	304 Stainless Steel						
Pump Shaft	304 Stainless Steel						
Straps	304 Stainless Steel						
Cable Guard	304 Stainless Steel						
Priming Inducer	304 Stainless Steel						
Coupling	329/420/431 Stainless Steel						
Check Valve Seat	NBR/304 Stainless Steel						
Top Bearing	Teflon/304 Stainless Steel						
Impeller Seal Ring	Teflon®						
Intermediate Bearings	Teflon®						

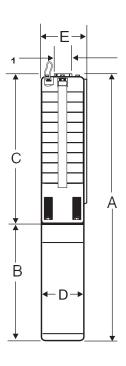

NOTES: Specifications subject to change without notice. Valox ® is a registered trademark of General Electric Co.

Available in 316SS configuration.