

DIMENSIONS AND WEIGHTS

MODEL NO	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIP WT.
				A	B	C	D	E	
35S07-3PETF	3/4	4"	2"NPT	26.9	11.7	15.2	3.8	3.9	30
35S10-4PETF	1	4"	2" NPT	29.7	12.5	17.2	3.8	3.9	31
35S15-6PETF	1 ½	4"	2" NPT	34.8	13.7	21.1	3.8	3.9	36
35S20-8PETF	2	4"	2" NPT	40.3	15.3	25	3.8	3.9	42
35S30-11PETF	3	4"	2" NPT	49.1	18	31.1	3.8	3.9	57
35S50-15PETF	5	4"	2" NPT	61.6	22.7	38.9	3.8	3.9	75
35S50-19PETF	5	4"	2" NPT	69.5	22.7	46.8	3.8	3.9	80
35S75-22PETF	7 ½	4"	2" NPT	79.4	26.7	52.7	3.8	3.9	95
35S75-22*PETF	7 ½	6"	2" NPT	78.7	23.5	55.2	5.5	5.5	124
35S75-25PETF	7 ½	4"	2" NPT	85.3	26.7	58.6	3.8	3.9	99
35S75-25*PETF	7 ½	6"	2" NPT	84.6	23.5	61.1	5.5	5.5	128
35S75-28PETF	7 ½	4"	2" NPT	91.2	26.7	64.5	3.8	3.9	103
35S75-28*PETF	7 ½	6"	2" NPT	91.5	23.5	67	5.5	5.5	132
35S100-31PETF	10	4"	2" NPT	101	30.6	70.4	3.8	3.9	115
35S100-31*PETF	10	6"	2" NPT	97.6	24.7	72.9	5.5	5.5	142
35S100-34PETF	10	4"	2" NPT	106.9	30.6	76.3	3.8	3.9	120
35S100-34*PETF	10	6"	2" NPT	103.5	24.7	78.8	5.5	5.5	146
35S100-38PETF	10	4"	2" NPT	114.8	30.6	84.2	3.8	3.9	125
35S100-38*PETF	10	6"	2" NPT	111.4	24.7	86.7	5.5	5.5	151
35S150-41*PETF	15	6"	2" NPT	131.	27	104.2	5.5	5.5	217
35S150-44*PETF	15	6"	2" NPT	137.1	27	110	5.5	5.5	223
35S150-47*PETF	15	6"	2" NPT	143	27	116	5.5	5.5	229
35S150-50*PETF	15	6"	2" NPT	148.9	27	121.9	5.5	5.5	235
35S150-53*PETF	15	6"	2" NPT	154.9	27	127.8	5.5	5.5	241
35S150-56*PETF	15	6"	2" NPT	160.8	27	133.7	5.5	5.5	246
35S200-60*PETF	20	6"	2" NPT	171.2	29.6	141.6	5.5	5.5	269
35S200-64*PETF	20	6"	2" NPT	179.1	29.6	149.5	5.5	5.5	277
35S200-67*PETF	20	6"	2" NPT	185	29.6	155.4	5.5	5.5	282

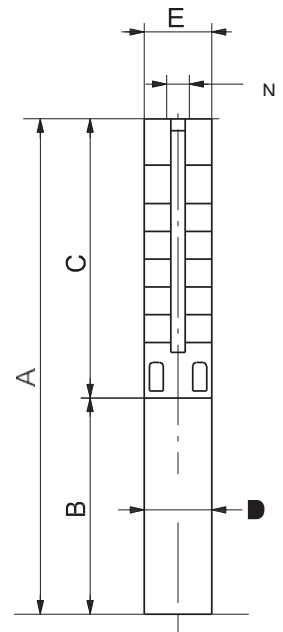


FIG. A

NOTES:
 All models suitable for use in 4" wells unless otherwise noted. Weights include pump end with motor in lbs.
 * Model for using in minimum 6" well diameter

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (3-67stgs)
Valve Casing	304 Stainless Steel
Valve Cup	304 Stainless Steel
Valve Seat	NBR/304 Stainless Steel
Neck Ring	PTFE Glass filled
Bearing	PTFE Glass filled
Washer for Stop Ring	Carbon/Graphite
Chamber	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Strainer	304 Stainless Steel
Shaft Complete	304 Stainless Steel
Strap	304 Stainless Steel
Cable Guard	304 Stainless Steel

NOTES:
 Specifications subject to change without notice.
 Available in 316SS configuration.